


The effect on traction of adding Priolube™ EF 7010 to Group III and Group IV base oils

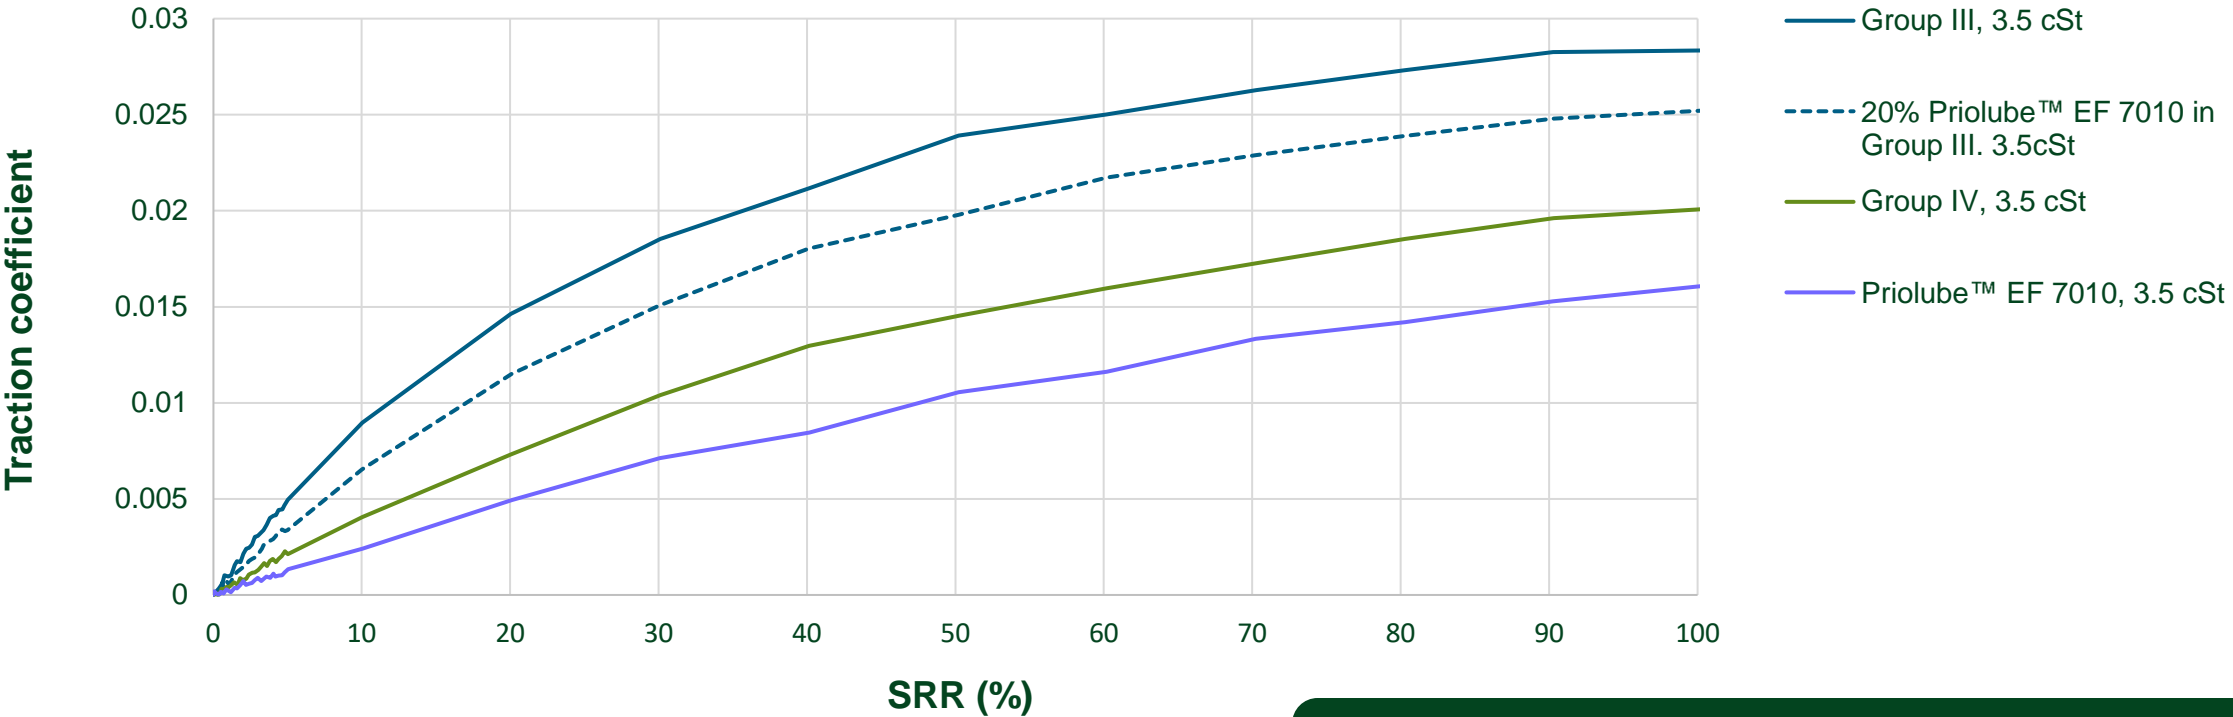

Parameter	Value
Speed	2.m/s
Temperature	75°C
Load	16N
SRR	0-100%

At the same viscosity (3.5cSt), a 20% addition of Priolube™ EF 7010 in Group III reduces traction by up to 16%.

Neat Priolube™ EF 7010 has up to 78% lower traction than neat Group III.